

THERMAL PRINT HEAD SPECIFICATION

Model No

B120



HEC SHANDONG HUALING ELECTRONICS CO., LTD.

REVISION					<u>Approved</u>
Rev	Description	Date	Approved	Drawn	
A	-----	00-6-15	T.Endo	HX.Cong	
B					<u>Checked</u>
					<u>Drawn</u>

CJP International Inc.
 "Your Global Technology Partner"

CJP International Inc.
 Higashi-Ikebukuro Q BLD. 8F
 2-23-2 , Higashi-Ikebukuro
 Toshima-ku , Tokyo 170-0013
 Japan
 TEL : 81-3-5391-7688
 FAX : 81-3-5391-7692
 e-mail : kokusai@cjp-net.co.jp
<http://www.cjptech.com>

Anaheim Office :
 CJP International Inc.
 610 N. Dwyer Drive
 Anaheim CA 92801
 USA
 TEL/FAX : 714-535-0185

1. Description

This specification is applied to B120 thermal print head.

2. Scope

The B120 is a thermal print head which has heat elements which produce 960 dots with 8 dots/mm by means of a high density thick film process. It also includes G-MOS ICs; Which operate as 960 bits shift-registers, latches and switching transistors to drive heat elements.

3. Outline

Item	Specification	Note
Dimension	Fig.5	
Schematic diagram	Fig.3	
Pin assignment	Table.3	
Print width	120 mm	
Number of heaters	960 dots	
Heater resolution	8 dots/mm	
Heater pitch	0.125 mm	
Printed dot dimension	0.11mm×0.13 mm	Nominal
Heater resistance	$\bar{R} = 2200 \Omega \pm 3 \% R = \bar{R} + 15\% - 20\%$	
Specifications for driver ICs	Table.2	
Number of driver ICs	64bits ×15	
Number of data inputs	1 serial input	
Number of strobes	4	
Logic power supply	5 V × 68 mA	at 2 MHz
Specification for Thermistor	$R_{25} = 30K \Omega \pm 5\%, B = 3,950K \pm 2\%$	Table. 1

4. Maximum ratings

Parameter	Symbol	Specification	Note
Heater energy consumption	Eomax	0.21 mJ/dot	2.5 ms/line
		0.20 mJ/dot	1.65 ms/line
Head voltage	VH	25.2 V	Between Connectors
Logic voltage	Vdd	Vdd=+5V±0.25V	
Environment temperature	Ta	+5 ° C ~ +50 ° C	Operating
		- 40 ° C ~ +80 ° C	Non-operating
Environment humidity		10 ~ 90%RH	Non-condensing
Maximum operating temperature	Ts	65 ° C 30min. MAX	
		Detected temperature of Thermistor shall not exceed 65 ° C.	Head temperature shall not exceed 70 ° C.

5. Standard printing conditions

Parameter	Symbol	Recommended operating conditions		Note
Speed		1.65 ms/line	2.5 ms/line	
		3 inch/sec	2 inch/sec	
Heater power consumption	Po	0.23 W/dot		$\bar{R} = 2200 \Omega$
Heat voltage	VH	24 V		Connectors
Heater energy consumption	Eo (ts)	0.20mJ/dot (0.87 ms)	0.21mJ/dot (0.91 ms)	$\bar{R} = 2200 \Omega$ (Note 1)
		0.16mJ/dot (0.70 ms)	0.17mJ/dot (0.74 ms)	
		0.15mJ/dot (0.65 ms)	0.16mJ/dot (0.70 ms)	
Supply current	Io	10.2 mA/dot		$\bar{R} = 2200 \Omega$
Timing chart		Fig. 2		
Platen pressure		16.7 ~ 21.6 N / TPH		
Platen hardness		30~40deg		
Platen diameter		$\Phi 14$ Max.		
Scanning resolution		8 line/mm		
Thermal paper		F24OAC / F220-VP MITSUBISHI PAPER MILL CO., LTD.		
Optical density		1.1 OD Min.		(Note 2)

(Note 1) Supply energy is defined by the following formula.

$$E_o = I_o^2 \bar{R} t_s = \frac{(VH - V_{com})^2 \cdot \bar{R} \cdot t_s}{(\bar{R} + R_{ic})^2}$$

$R_{ic} = 70 \Omega$: Driver IC “ ON ” resistance

t_s : Strobe printing pulse width

VH : Heat voltage

$\bar{R}$: Heater average resistance

$V_{com} = 0.5V$: Common electrode voltage drop

(Note 2) Printed optical density is measured at 10mm intervals after the starting point. Printed optical density is measured by a RD-914 reflector optical density meter or equivalent .

6. Life expectancy

6.1 The life expectancy under 12.5% printing duty of less at 25° C is defined by the following whichever earlier comes.

Item	Specification	Note
Number of pulses	1×10^8 pulses	
Run length	50 Km	

6.2 Under 10% humidity, the platen roller which is protected by a rubber insulator, will operate under test conditions with no paper for a maximum of 3Km, before the heat element fails.

7. Warning during use

7.1 Strobe signal

During head power supply ON/OFF sequence strobes should be kept "disable".

7.2 Stability of IC operation

Care should be taken for stable operation of driver ICs as indicated bellow. (Fig.1)

- (1) If the voltage including surge exceeds maximum rating of driver IC, the TPH may burn out by latch-up. Care should be taken especially when head current changes by strobes or at the ON/OFF sequence. The voltage shall be kept within the following voltage.

VH	: 0V ~ +28V
Vdd	: 0V ~ +6.5V
Other signals	: GND -0V ~ Vdd+0.3V

7.3 The heater and driver ICs are electrostatically sensitive. Care should be taken not to touch connectors with hands or an electrostatically charged object. It is recommended that brushes near the head be provided to discharge electrostatic build up.

7.4 On the surface near the heater, do not apply any hard material. The abrasion resistant layer is fragile to mechanical impact.

7.5 Ink dregs adhered to the heater should be wiped off softly with a soft cloth dipped alcohol or detergent. Do not use sandpaper or equivalent.

7.6 Keep hard particles out of the heater surface. Hard particles may scratch the abrasion resistant layer.

7.7 Maximum number of heaters for simultaneous is 256.

7.8 When the printer is on standby, the thermal head (VH) must be switched off.

Fig. 1 Recommend Connection

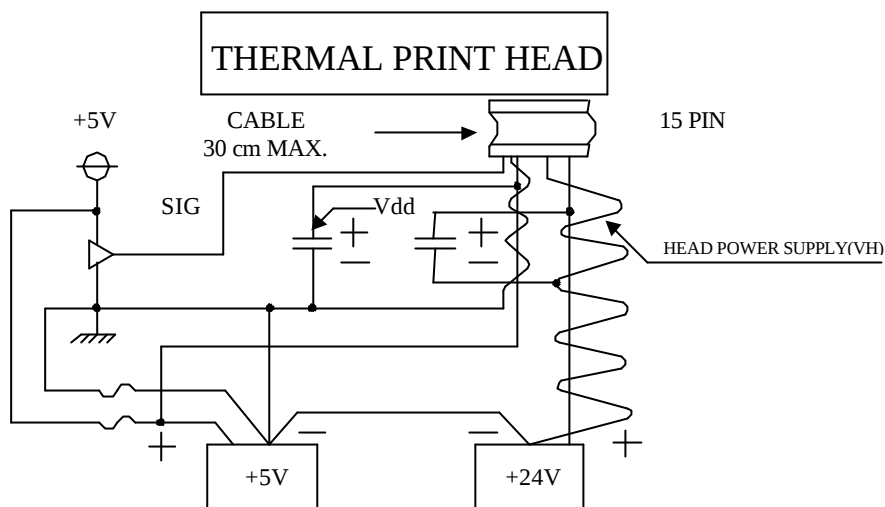


Table. 1 Thermistor

$$R_{25} = 30K\Omega \pm 5\%, B_{CONST} = 3950\text{kelvin} \pm 2\%, R = R_{25}e^{B(1/T - 1/T_{25})}$$

Temperature (° C)	Thermistor Resistance (R)		
	Min .(KΩ)	Typ. (KΩ)	Max. (KΩ)
-40.0	924.3	1048	1184
-35.0	667.4	751.1	843.1
-30.0	487.6	545.0	607.6
-25.0	360.0	399.9	442.9
-20.0	268.8	296.6	326.5
-15.0	202.7	222.3	243.2
-10.0	154.2	168.2	182.9
-5.0	118.4	128.4	138.9
0.0	91.70	98.90	106.4
5.0	71.65	76.71	82.10
10.0	56.20	59.99	63.88
15.0	44.50	47.27	50.10
20.0	35.49	37.53	39.58
25.0	28.50	30.00	31.50
30.0	22.84	24.14	25.46
35.0	18.42	19.55	20.71
40.0	14.95	15.93	16.94
45.0	12.20	13.06	13.94
50.0	10.02	10.76	11.54
55.0	8.271	8.920	9.596
60.0	6.864	7.430	8.021
65.0	5.726	6.219	6.738
70.0	4.799	5.230	5.686
75.0	4.041	4.418	4.819
80.0	3.418	3.749	4.102

Table. 2 C-MOS Driver IC

Table 2.1 Electrical characteristics for driver IC.

Absolute maximum ratings for driver ICs.

Parameter	Symbol	Test conditions	Ratings	Unit
Supply voltage	V_{dd}	Surge	0 ~ 6.5	V
	V_H	Surge	0 ~ 28	V
Input voltage for logic	V_{IN}		0 ~ $V_{dd} + 0.3$	V

Recommended operating conditions

Parameter	Symbol	Test conditions	Recommendations			Unit
			Min.	Typ.	Max.	
Supply voltage	V_{dd}		4.75	5.0	5.25	V
	V_H	Supply voltage for V_H	23.5	24.0	24.5	V
Input voltage for logic	V_{IH}	(Note 1)	$0.8 \times V_{dd}$		V_{dd}	V
	V_{IL}		0		$0.2 \times V_{dd}$	V
Clock frequency	f_{CLK}	duty 50%	0.1	1.0	3.5	MHz

(Note 1) Recommended driver IC is 74HC244 or equivalent.

Table 2.2 Electrical characteristics for driver IC.

Parameter	Symbol	Test conditions	Ratings			Unit
			Min.	Typ.	Max.	
Input current	$\overline{LATCH}$	(Note 1) I_{IH} $V_{dd} = 5.75V$ $V_{IH} = 5.75V$			7.5	μA
	$\overline{STROBE}$				2.0	μA
	CLOCK				7.5	μA
	DATA IN				0.5	μA
	$\overline{LATCH}$	I_{IL} $V_{dd} = 5.75V$ $V_{IL} = 0V$	-7.5			μA
	$\overline{STROBE}$		-220			μA
	CLOCK		-8.0			μA
	DATA IN		-0.5			μA
Output voltage of drivers (Heater supply voltage)	V_{OL}	$V_{dd} = 5V$ $T_j = 0^\circ C$		1.1	1.7	V
		$I_{OL} = 15mA$ $T_j = 70^\circ C$		1.5	2.3	
Leak current of drivers	I_{OH}	$V_{dd} = 4.25V$ $V_H = 24V$			1.0	$\mu A/dot$
Logic supply current	I_{dd}	$V_{dd} = 5.25V$ ALL WHITE $f_{CLK} = 2MHz$			68	mA

(Note 1) Each $\overline{STROBE}$ includes pull-up resistance of $300K\Omega \pm 50\%$ per IC.

Table 2.3 Switching characteristics for driver ICs.

Parameter	Symbol	Test conditions	Ratings			Unit
			Min.	Typ.	Max.	
Clock frequency	f_{MAX}				4.0	MHz
Clock pulse width	$tw(T)$		70			ns
Data setup time	$tsu(D)$		50			ns
Data hold time	$th(D)$		40			ns
Latch setup time	$tsu(LA)$		100			ns
Latch pulse width	$tw(LA)$		100			ns
Strobe setup time	$tsu(\overline{STB})$		100			ns
Strobe to driver Output delay time	$TpLH$ $TpHL$				3.5	μs


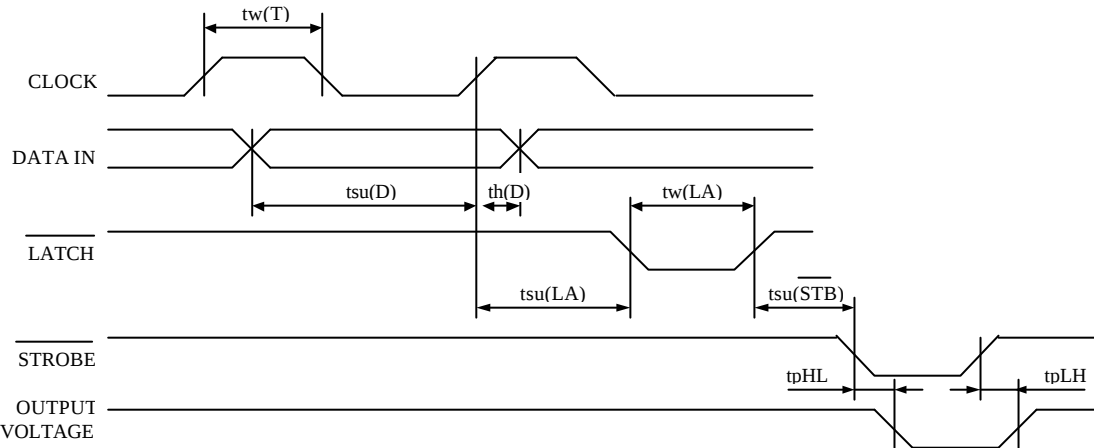


Fig. 2 Thermal Print Head (B120) Timing Chart

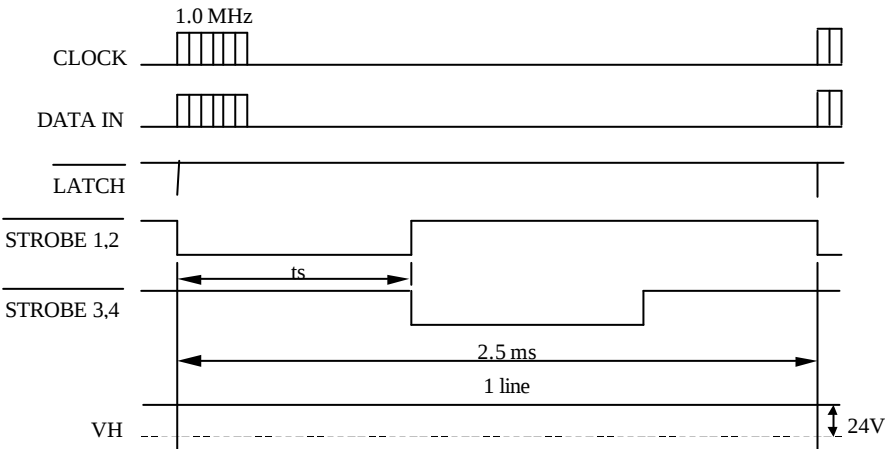

The diagram illustrates a 960-bit shift register system. On the left, input lines are labeled: VH(+24V), THERMISTOR (connected to a thermistor symbol), VDD(+5V), STROBE 4, STROBE 3, STROBE 2, STROBE 1, LATCH, DATA IN, and CLOCK. The shift register is represented by a long horizontal block labeled '960 BIT SHIFT REGISTER' at the bottom. Above this block, a series of 16 AND gates are shown, each with a number above it: 960, 705, 704, 513, 512, 257, 256, and 1. The THERMISTOR input is connected to the first AND gate (960). The STROBE inputs are connected to the AND gates in a specific pattern: STROBE 4 to the first AND gate, STROBE 3 to the second, STROBE 2 to the third, and STROBE 1 to the fourth. The LATCH input is connected to the output of the first AND gate. The output of the first AND gate is connected to the input of the 960-bit shift register. The output of the 960-bit shift register is connected to the input of the second AND gate (705). This pattern continues, with the output of the 960-bit shift register connected to the input of the next AND gate in the sequence. The output of the 16th AND gate (1) is connected to the input of the 960-bit shift register. The output of the 960-bit shift register is connected to the input of the first AND gate (960).

Technical drawing of a mechanical part showing dimensions and a heat element. The drawing includes the following dimensions and features:

- Overall width: 5.0 ± 0.3
- Top left width: 2.0 ± 0.2
- Top left width (inner): 0.9
- Top left width (inner): 4.3 ± 0.2
- Heat element: A curved line labeled "HEAT ELEMENT" with a diameter of $\phi 14$.
- Heat element height: MAX. 1.0
- Heat element height (right): MAX. 2.0
- Bottom left width: MIN 5.63
- Bottom left width: MAX 10.1
- Bottom left width: MIN. 13.0
- Bottom left width: 15.0 ± 0.2
- Bottom left width: MAX. 18.25
- Bottom left width (total): (23.15)

Connector : (S15B-PH-K-S-2.2:JST)

PIN	NAME	PIN	NAME
1	VH	9	$\overline{STROBE\ 1}$
2	VH	10	$\overline{STROBE\ 2}$
3	VH	11	$\overline{STROBE\ 3}$
4	GND	12	$\overline{STROBE\ 4}$
5	GND	13	CLOCK
6	GND	14	$\overline{LATCH}$
7	Vdd	15	DATA IN
8	THERMISTOR		

Fig. 5 Dimension

