

THERMAL PRINT HEAD SPECIFICATION

Model No

3T54-2I



HEC SHANDONG HUALING ELECTRONICS CO., LTD.

REVISION					<u>Approved</u>
Rev	Description	Date	Approved	Drawn	
A	-----	00-6-15	T.Endo	HX.Cong	
B					<u>Checked</u>
					<u>Drawn</u>

CJP International Inc.
 "Your Global Technology Partner"

CJP International Inc.
 Higashi-Ikebukuro Q BLD. 8F
 2-23-2 , Higashi-Ikebukuro
 Toshima-ku , Tokyo 170-0013
 Japan
 TEL : 81-3-5391-7688
 FAX : 81-3-5391-7692
 e-mail : kokusai@cjpn-net.co.jp
<http://www.cjptech.com>

Anaheim Office :
 CJP International Inc.
 610 N. Dwyer Drive
 Anaheim CA 92801
 USA
 TEL/FAX : 714-535-0185

1. Description

This specification is applied to 3T54-2I thermal print head.

2. Scope

The 3T54-2I is a thermal print head which has heat elements which produce 640 dots with 300 dots/inch by means of a high density thick film process. It also includes C-MOS ICs; Which operate as 640 bits shift-registers, latches and switching transistors to drive heat elements.

3. Outline

Item	Specification	Note
Dimension	Fig.5	
Schematic diagram	Fig.3	
Pin assignment	Table.3	
Print width	54.2 mm	
Number of heaters	640 dots	
Heater resolution	300 dots/inch	
Heater pitch	0.0847 mm	
Printed dot dimension	0.08mm×0.10 mm	Nominal
Heater resistance	$\bar{R}=800\Omega\pm3\%$	
Specifications for driver ICs	Table.2	
Number of driver ICs	64bits × 10	
Number of data inputs	2 parallel input	
Number of strobes	2	
Logic power supply	5 V × 70 mA	at 4 MHz
Specification for Thermistor	$R_{25}=30K\Omega\pm5\%, B=3,950K\pm2\%$	Table. 1

4. Maximum ratings

Parameter	Symbol	Specification	Note
Heater energy consumption	Eomax	0.18 mJ/dot	2 ms/line
		0.14 mJ/dot	1.0 ms/line
		0.08 mJ/dot	0.5 ms/line
Head voltage	VH	25.2 V	Between Connectors
Logic voltage	Vdd	Vdd=+5V±0.25V	
Environment temperature	Ta	+5 ° C ~ +50 ° C	Operating
		- 40 ° C ~ +80 ° C	Non-operating
Environment humidity		10 ~ 90%RH	Non-condensing
Maximum operating temperature	Ts	65 ° C 30min. MAX	
		Detected temperature of Thermistor shall not exceed 65 ° C.	Head temperature shall not exceed 70 ° C.

5. Standard printing conditions

Parameter	Symbol	Recommended operating conditions		Note
Speed		0.5 ms/line	1.0 ms/line	
Heater power consumption	Po	0.62 W/dot		$\bar{R}=800\ \Omega$
Heat voltage	VH	24 V		Connectors
Heater energy consumption	Eo (ts)	0.08mJ/dot (0.13 ms)	0.14mJ/dot (0.23 ms)	$\bar{R}=800\ \Omega$ (Note 1)
		0.07mJ/dot (0.11 ms)	0.13mJ/dot (0.21 ms)	
		0.06mJ/dot (0.10 ms)	0.10mJ/dot (0.16 ms)	
Supply current	Io	27.7 mA/dot		$\bar{R}=800\ \Omega$
Timing chart		Fig. 2		
Platen pressure		7.9 ~ 9.8 N / TPH		
Platen hardness		30~40deg		
Platen diameter		$\Phi 14$ Max.		
Scanning resolution		300 line/inch		
Thermal paper		F24OAC / F220-VP MITSUBISHI PAPER MILL CO., LTD.		
Optical density		1.1 OD Min.		(Note 2)

(Note 1) Supply energy is defined by the following formula.

$$E_o = I_o^2 \bar{R} t_s = \frac{(VH - V_{com})^2 \cdot \bar{R} \cdot t_s}{(\bar{R} + R_{ic})^2}$$

$$R_{ic} = 47\ \Omega$$

: Driver IC “ON” resistance

$$t_s$$

: Strobe printing pulse width

$$VH$$

: Heat voltage

$$\bar{R}$$

: Heater average resistance

$$V_{com} = 0.5V$$

: Common electrode voltage drop

(Note 2) Printed optical density is measured at 10mm intervals after the starting point. Printed optical density is measured by a RD-914 reflector optical density meter or equivalent .

6. Life expectancy

6.1 The life expectancy under 12.5% printing duty of less at 25° C is defined by the following whichever earlier comes.

Item	Specification	Note
Number of pulses	1×10^8 pulses	
Run length	100 Km	

6.2 Under 10% humidity, the platen roller which is protected by a rubber insulator, will operate under test conditions with no paper for a maximum of 3Km, before the heat element fails.

7. Warning during use

7.1 Strobe signal

During head power supply ON/OFF sequence strobes should be kept "disable".

7.2 Stability of IC operation

Care should be taken for stable operation of driver ICs as indicated bellow. (Fig.1)

- (1) If the voltage including surge exceeds maximum rating of driver IC, the TPH may burn out by latch-up. Care should be taken especially when head current changes by strobes or at the ON/OFF sequence. The voltage shall be kept within the following voltage.

VH : 0V ~ +28V

Vdd : 0V ~ +6.5V

Other signals : GND -0V ~ Vdd+0.3V

- 7.3 The heater and driver ICs are electrostatically sensitive. Care should be taken not to touch connectors with hands or an electrostatically charged object. It is recommended that brushes near the head be provided to discharge electrostatic build up.

- 7.4 On the surface near the heater, do not apply any hard material. The abrasion resistant layer is fragile to mechanical impact.

- 7.5 Ink dregs adhered to the heater should be wiped off softly with a soft cloth dipped alcohol or detergent. Do not use sandpaper or equivalent.

- 7.6 Keep hard particles out of the heater surface. Hard particles may scratch the abrasion resistant layer.

- 7.7 Maximum number of heaters for simultaneous is 640.

- 7.8 When the printer is on standby, the thermal head (VH) must be switched off.

Fig. 1 Recommend Connection

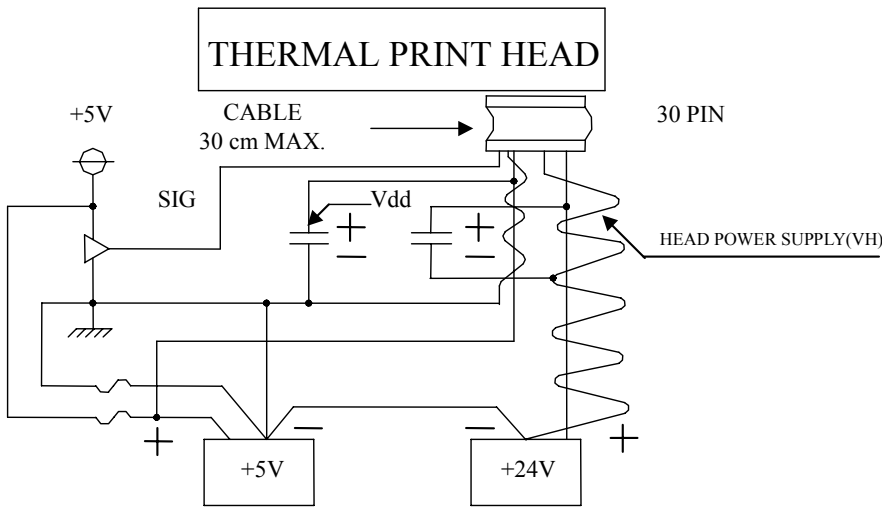


Table. 1 Thermistor

$R_{25} = 30K\Omega \pm 5\%$, $B_{CONST} = 3950\text{kelvin} \pm 2\%$, $R = R_{25}e^{B(1/T - 1/T_{25})}$

Temperature (° C)	Thermistor Resistance (R)		
	Min .(KΩ)	Typ. (KΩ)	Max. (KΩ)
-40.0	924.3	1048	1184
-35.0	667.4	751.1	843.1
-30.0	487.6	545.0	607.6
-25.0	360.0	399.9	442.9
-20.0	268.8	296.6	326.5
-15.0	202.7	222.3	243.2
-10.0	154.2	168.2	182.9
-5.0	118.4	128.4	138.9
0.0	91.70	98.90	106.4
5.0	71.65	76.71	82.10
10.0	56.20	59.99	63.88
15.0	44.50	47.27	50.10
20.0	35.49	37.53	39.58
25.0	28.50	30.00	31.50
30.0	22.84	24.14	25.46
35.0	18.42	19.55	20.71
40.0	14.95	15.93	16.94
45.0	12.20	13.06	13.94
50.0	10.02	10.76	11.54
55.0	8.271	8.920	9.596
60.0	6.864	7.430	8.021
65.0	5.726	6.219	6.738
70.0	4.799	5.230	5.686
75.0	4.041	4.418	4.819
80.0	3.418	3.749	4.102

Table. 2 C-MOS Driver IC

Table 2.1 Electrical characteristics for driver IC.

Absolute maximum ratings for driver ICs.

Parameter	Symbol	Test conditions	Ratings	Unit
Supply voltage	V_{dd}	Surge	0 ~ 6.5	V
	V_{H}	Surge	0 ~ 28	V
Input voltage for logic	V_{IN}		0 ~ $V_{dd} + 0.3$	V

Recommended operating conditions

Parameter	Symbol	Test conditions	Recommendations			Unit
			Min.	Typ.	Max.	
Supply voltage	V_{dd}		4.75	5.0	5.25	V
	V_{H}	Supply voltage for VH	23.5	24.0	24.5	V
Input voltage for logic	V_{IH}	(Note 1)	$0.8 \times V_{dd}$		V_{dd}	V
	V_{IL}		0		$0.2 \times V_{dd}$	V
Clock frequency	f_{CLK}	duty 50%	0.1	4	10	MHz

(Note 1) Recommended driver IC is 74HC244 or equivalent.

Table 2.2 Electrical characteristics for driver IC.

Parameter	Symbol	Test conditions	Ratings			Unit
			Min.	Typ.	Max.	
Input current	$\overline{LATCH}$	(Note 1) I_{IH}			5	μA
	$\overline{STROBE}$				2.5	μA
	CLOCK				5	μA
	DATA IN				0.5	μA
	$\overline{LATCH}$	I_{IL}	-5			μA
	$\overline{STROBE}$		-275			μA
	CLOCK		-5			μA
	DATA IN		-0.5			μA
Output voltage of drivers (Heater supply voltage)	V_{OL}	$V_{dd} = 5\text{ V}$ $I_{OL} = 20\text{ mA}$		1.5	2.0	V
Leak current of drivers	I_{OH}	$V_{dd} = 4.25\text{ V}$ $V_{H} = 24\text{ V}$			1.0	$\mu A/\text{dot}$
Logic supply current	I_{dd}	$V_{dd} = 5.5\text{ V}$ Action $f_{CLK} = 4\text{ MHz}$			70	mA

(Note 1) Each $\overline{STROBE}$ includes pull-up resistance of $300\text{ K}\Omega \pm 50\%$ per IC.

Table 2.3 Switching characteristics for driver ICs.

Parameter	Symbol	Test conditions	Ratings			Unit
			Min.	Typ.	Max.	
Clock frequency	f_{MAX}				10	MHz
Clock pulse width	tw(T)		40			ns
Data setup time	tsu(D)		40			ns
Data hold time	th(D)		40			ns
Latch setup time	tsu(LA)		50			ns
Latch pulse width	tw(LA)		50			ns
Strobe to driver Output delay time	TpLH TpHL				4.0	μ s

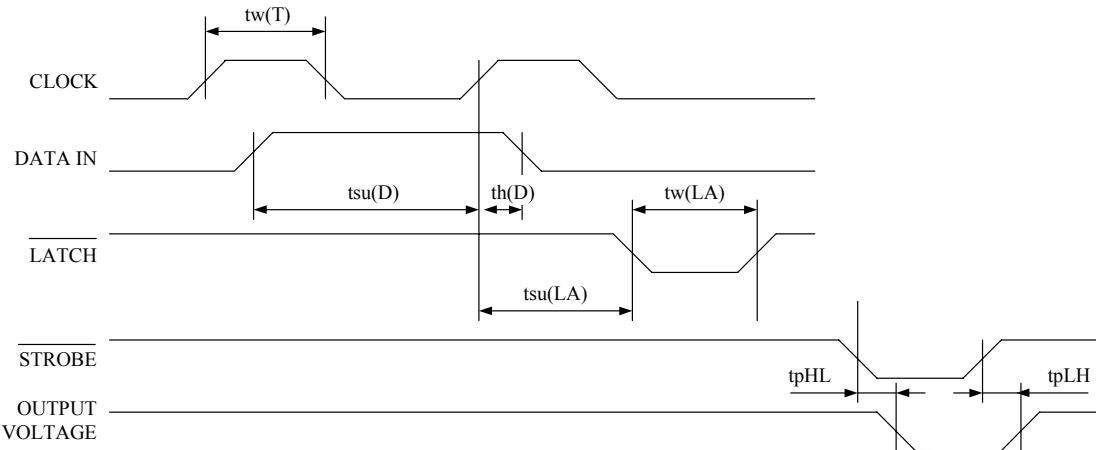


Fig. 2 Thermal Print Head (3T54-2I) Timing Chart

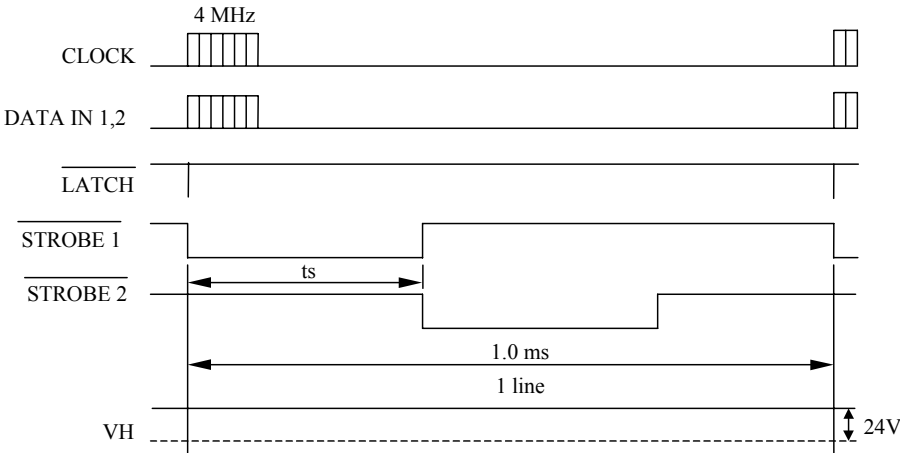


Fig. 3 Schematic Diagram

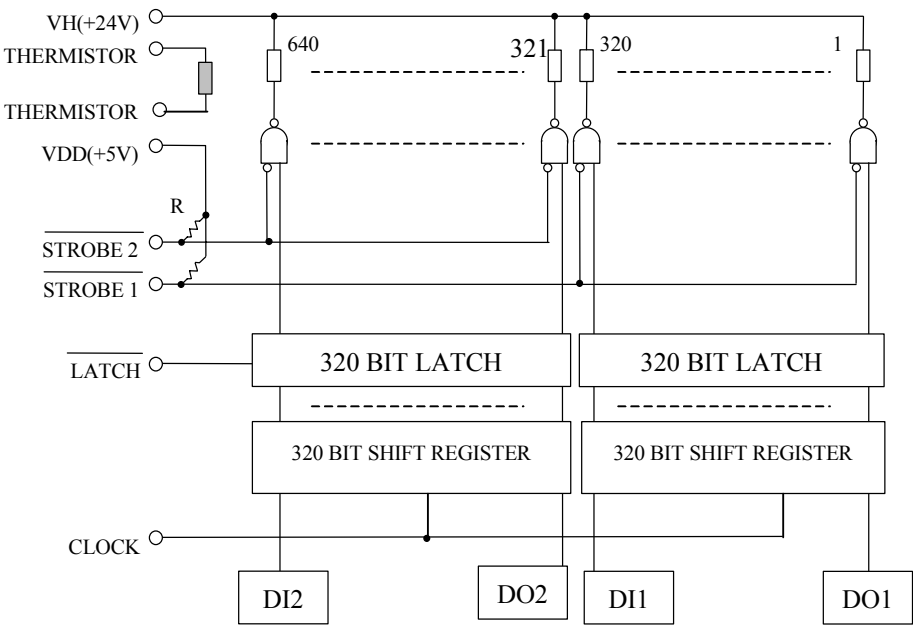


Fig. 4 Cross Section

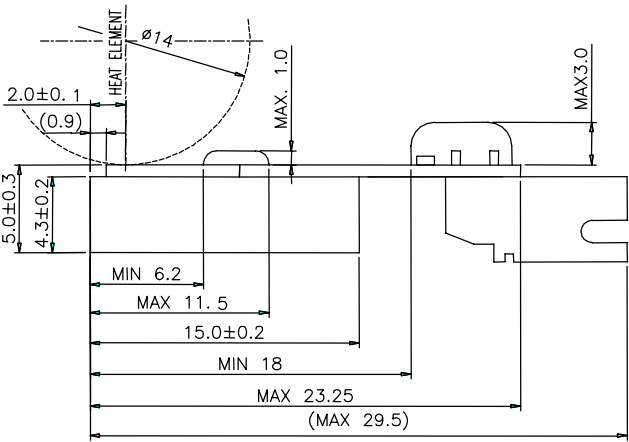


Table. 3 Pin assignment

Connector : (S30B-PHDSS or EQUIVALENT)

PIN	NAME	PIN	NAME	PIN	NAME	PIN	NAME
1	VH	9	DATA IN 2	17	THERMISTOR	25	GND
2	VH	10	DATA OUT 2	18	CLOCK	26	GND
3	GND	11	$\overline{STROBE1}$	19	NC	27	GND
4	VH	12	$\overline{STROBE2}$	20	NC	28	VH
5	GND	13	THERMISTOR	21	NC	29	VH
6	GND	14	$\overline{LATCH}$	22	NC	30	VH
7	DATA IN 1	15	Vdd	23	NC		
8	DATA OUT 1	16	NC	24	NC		

Technical drawing of the SHEC 3T54-2I 109 150000 component, showing two views: a top view and a side view.

Top View Dimensions:

- Overall width: 65.5 ± 0.3
- Substrate size: (59.6)
- Print width: 54.2
- Pin locations: PIN No. 1, PIN No. 2, PIN No. 29, PIN No. 30
- Internal dimensions: 23.25 ± 0.3 , (29.5 MAX) , (57.5)
- Other labels: DOT 640, C/L, DOT 1

Side View Dimensions:

- Overall height: 4.75 ± 0.15
- Mounting holes: $2-M3$
- Central slot: 4.0 ± 0.15
- Component label: SHEC 3T54-2I 109 150000

ITEM	DESCRIPTION	MATERIAL	DEF	SUMMARYS
1	SUBSTRATE	CERAMIC	1	
2	HEAT SINK	ALUMINIUM	1	
3	CIRCUIT BOARD	FR4	1	M2VO
4	CONNECTOR		1	S30B-PIHSS(JST) or equivalent
5	ADHESIVE		1	
6	EPOXY MOLD		1	
7	THERMISTOR		1	
8	UV-ADHESIVE		1	

NOTE:

1. COMPOSITION OF LOT No. 1 09
(2001) (Sep)
2. IN CASE OF M3 SCREW USED FOR FIXATION.
DEPTH IS 3.5 MAX.